


# BRUSHED AXIAL FANS

## VA51-AP70/LL-69A



## Performance diagram

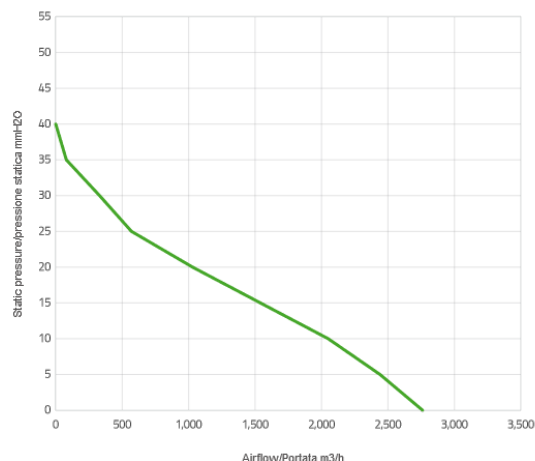

## Performance chart

Static pressure	Airflow	Current draw	Airflow	Static pressure
mm H <sub>2</sub> O	m <sup>3</sup> /h	A	CFM	in H <sub>2</sub> O
0	2760	17,9	1628	0
5,0	2440	19,3	1440	0,2
10,0	2050	20,2	1210	0,4
15,0	1540	20,0	909	0,6
20,0	1030	21,8	608	0,8
25,0	570	23,1	336	1,0

This is a not-controlled copy electronically created from the web site [www.spalautomotive.com](http://www.spalautomotive.com). The information contained herein is subject to change without notice. This catalogue/web site does not imply that any such parts are available for supply. The publisher and any party associated with the production of this catalogue/web site do not accept any responsibility or liability whatsoever (to the extent permitted by law) for any inaccuracy, error, misinformation or misleading statements, whether negligently caused or otherwise, contained in this publication. This publication is protected by copyright and may not be reproduced or copied (using any method of reproduction or copying), sold, transmitted, circulated or otherwise forwarded to third parties, in whole or part, without prior written consent of the author.

Static pressure	Airflow	Current draw	Airflow	Static pressure
30,0	330	25,4	195	1,2
35,0	80	28,4	47	1,4
40,0	0	29,1	0	1,6

- N°4 BORCHIE - ALTEZZA H = 14.5  
 FORI Ø6.2 - INTERASSE Ø336.9  
 - N°4 BOSSES - HEIGHT H = 14.5  
 HOLES Ø6.2 - INTERAXLE Ø336.9

- N°4 GANCI PER PERNI Ø6  
 INTERASSE Ø340.1  
 - N°4 HOOKS Ø6  
 INTERAXLE Ø340.1

