


BRUSHED AXIAL FANS

VA01-AP70/LL-79S

Performance diagram

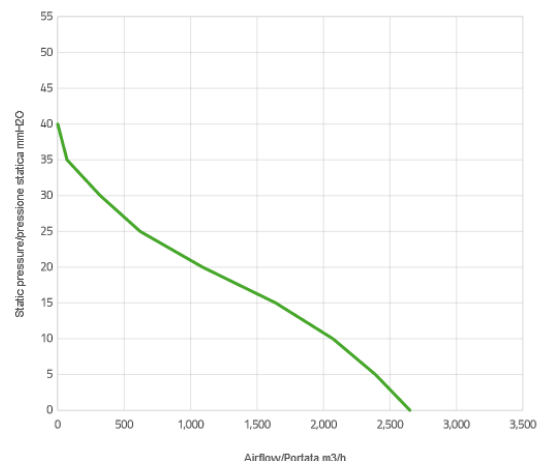

Performance chart

Static pressure	Airflow	Current draw	Airflow	Static pressure
mm H ₂ O	m ³ /h	A	CFM	in H ₂ O
0	2650	15,8	1564	0
5,0	2390	16,4	1410	0,2
10,0	2070	17,0	1221	0,4
15,0	1640	17,1	968	0,6
20,0	1090	17,4	643	0,8
25,0	620	18,0	366	1,0


This is a not-controlled copy electronically created from the web site www.spalautomotive.com. The information contained herein is subject to change without notice. This catalogue/web site does not imply that any such parts are available for supply. The publisher and any party associated with the production of this catalogue/web site do not accept any responsibility or liability whatsoever (to the extent permitted by law) for any inaccuracy, error, misinformation or misleading statements, whether negligently caused or otherwise, contained in this publication. This publication is protected by copyright and may not be reproduced or copied (using any method of reproduction or copying), sold, transmitted, circulated or otherwise forwarded to third parties, in whole or part, without prior written consent of the author.

Static pressure	Airflow	Current draw	Airflow	Static pressure
30,0	320	18,9	189	1,2
35,0	70	20,7	41	1,4
40,0	0	21,0	0	1,6

- N°4 BORCHIE - ALTEZZA H = 7.5
 FORI Ø6.5 - INTERASSE Ø336.9 ± 0.5
 - N°4 BOSSES - HEIGHT H = 7.5
 HOLES Ø6.5 - INTERAXLE Ø336.9 ± 0.5

- N°4 GANCI PER PERNI Ø6
 INTERASSE Ø340.1 ± 0.5
 - N°4 HOOKS Ø6
 INTERAXLE Ø340.1 ± 0.5

SEDE PER ANELLO IN GOMMA
 RUBBER RING HOUSING

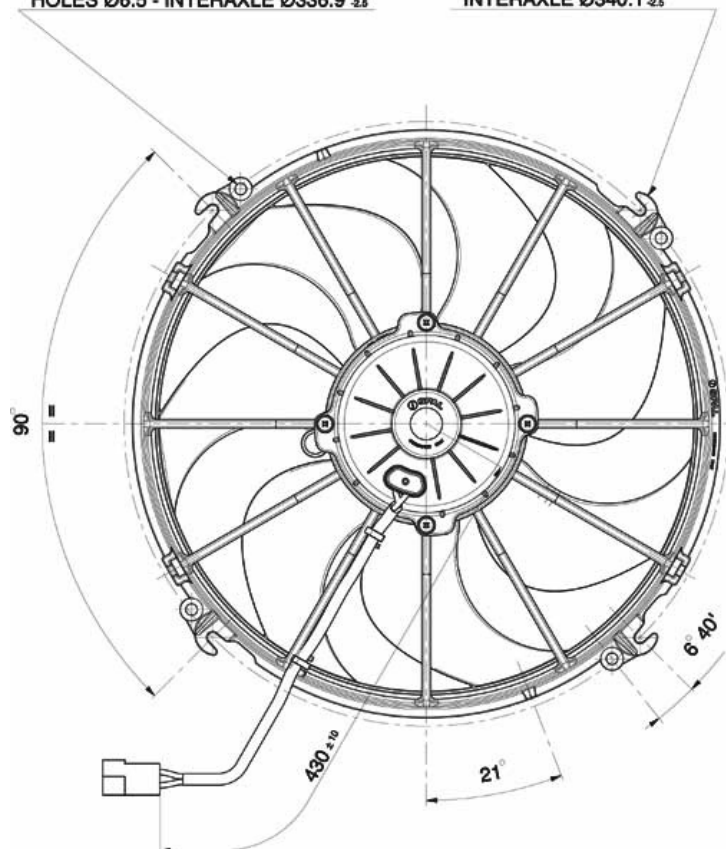

AIRFLOW